


## Data-sheet

Product	technical datas	Options	Standards
<b>LCR 2-mot Relais Box</b>	Input/Output 29V/DC	charging cable for Accu use	EN60335
	Max. Output Current 5A/DC	Overload Protection for each motor channel individuel	
	2 Motor Output	different cable or socket In/outputs possible	
	Intermitted mode with 10 % duty cycle with max. continuous use of 2 min		
	Protection type IP20		
	Overload Protection		
	Overcurrent Protection		
	Housing colour black RAL 9005		
	Housing material ABS V0		
	Ambient temperature 30°C		
	Dimensions (lxwxh)160mmx55mmx38mm		
	weight 210g		



LCR 2-mot Relais Box

H [mm]	L [mm]	W [mm]
38	160	55

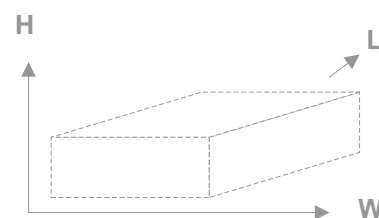

General dimension