


## Data-sheet

Product	technical datas	Options	Standards
<b>Lilo-Charger 7S; Model LCH 735</b>	7 cell configuration	Country Versions EU flat plug, UK, US and AUS	EN60335
	Input voltage 100 – 240 V/AC	available with different DC plugs	EN60602
	Nominal Output Voltage Output 29,4V/DC		EN55014
	Charging current 350mA		
	Power approx. 20W		
	Wallmount Version		
	2meter DC cable with 4/1,7 socket		
	Over Temperature Protection		
	Short Circuit Protection		
	Over Current Protection		
	Over Voltage Protection		
	Ambient temperature 40°C		
	Dimensions (l x w x h) 93,5mm x 47mm x 35mm		
	Protection type IP20		



**Lilo-Charger 7S; Model LCH 735**

H [mm]	L [mm]	W [mm]
35	93.5	47

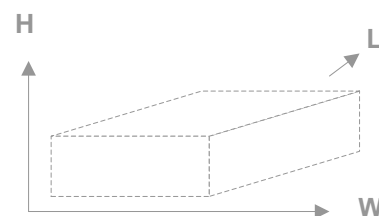

**General dimension**