


Data-sheet

Product	technical datas	Options	Standards
LLPS Powerp.1300mAh Lilo. 7S1P	7 cell configuration	charging and operate through a standard SMPS	EN60335
	Nominal capacity 1300mAh @23°C	mounting bracket	MSN
	Nominal Output Voltage Output 25,2V/DC	Customer Sticker (LOGO) on the Top housing	UN38.x
	Macimum Output Voltage 29,4V/DC	mounting feets	
	Max. Output Current 5A/DC	higher capacity	
	ON/OFF Switch		
	Overcurrent cutoff		
	Output short-circuit protection		
	Undervoltage Lock out		
	Accustical signal (beeper) 20...21,45V/DC		
	Protection type IP20		
	Protection class II		
	Intermitted mode with 10 % duty cycle with max. continuous use of 2 min		
	Housing colour black RAL 9005		
	Housing material ABS V0		
	Ambient temperature 30°C		
	Dimensions (lwxh) 120mx87mmx40mm		
	Weight 470g		
No Stand by Power consumption			



Lithium Ion Accu Pack; LLPS7S1P

H [mm]	L [mm]	W [mm]
41	121	81

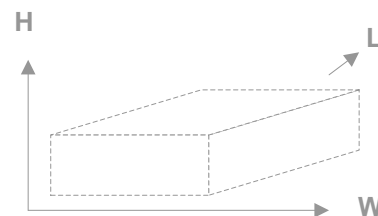

General dimension